

HI SHARP
ELECTRONICS CO., LTD.
SECURITY INTELLIGENCE



IP CAMERA
HS-D071TQ-D

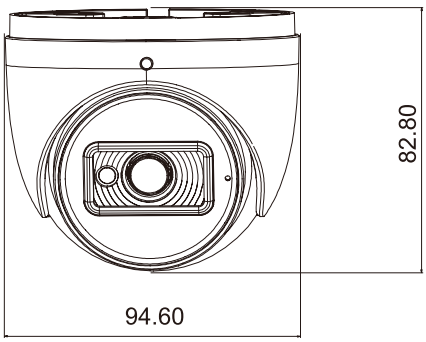

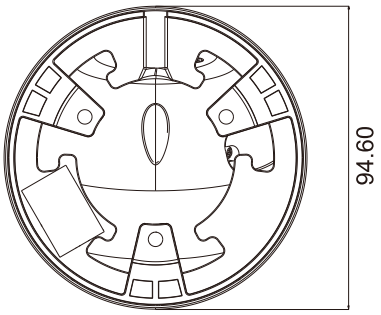

- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- 2MP (1920 × 1080)
- 20 ~ 30m IR night view distance
- 3D DNR, DWDR, HLC, BLC
- ICR auto switch, true day / night
- Built-in micro SD card slot, up to 256GB
- 1CH built-in MIC
- Support ROI coding
- Support dual streams
- IP67 ingress protection
- Intelligent analytics: Exception, Line Crossing, Intrusion

RoHS CE FC

Address: No.673, Changxing Rd., Bade Dist., Taoyuan City, Taiwan
Website: www.hisharp.com | E-Mail：sales@hisharp.com.tw
Tel: +886-3-3653121 | Fax: +886-3-3681482

HI SHARP
ELECTRONICS CO., LTD.

2MP IP IR WATER-PROOF DOME CAMERA

Camera			
Image Sensor	1 / 2.8" CMOS		
Image Size	1920 × 1080		
Electronic Shutter	1 / 3 s ~ 1 / 100,000 s		
Min. Illumination	0.008 lux @F1.6, AGC ON; 0 lux with IR		
Lens	Board 2.8 mm @F1.6		
FOV	Horizontal	Vertical	Diagonal
	107°	56°	126°
Lens Mount	M12		
IR Distance	20 ~ 30 m		
WDR	DWDR		
Day & Night	ICR auto switch		
BLC	YES		
HLC	YES		
Digital Defog	-		
Digital NR	3D DNR		
Angle Adjustment	Pan: 0° ~360° ; Tilt:0° ~75° ;Rotation: 0° ~360°		
Image			
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG		
H.265 Compression Standard	Main Profile @Leve4.1 High Tier		
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF		
Main Stream (S1)	1080P / 720P (60Hz: @30fps ; 50Hz: @25fps)		
Sub Stream (S2)	D1 / CIF (60Hz: @30fps ; 50Hz: @25fps)		
Bit Rate	128 Kbps ~ 4 Mbps		
Bit Rate Type	VBR / CBR		
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser		
ROI	Each ROI to be configured separately		
Audio			
Audio Compression	G.711A / U		
Two-way audio	-		
Interfaces			
Network	RJ45		
Video Output	-		
Audio line in	1CH audio input; 1CH built-in MIC		
Audio line out	-		
Alarm Input	-		
Alarm Output	-		
Storage			
SD card	Built-in micro SD card slot; up to 256GB		
Network remote storage	Yes		
Hardware Reset	Yes		



IVS


HS-D071TQ-D

Functions	
Remote Monitoring	Web browser,CMS remote control
Web Browser	IE(plug-in required) /Google Chrome /Edge / Firefox /Safari
Online Connection	Support simultaneous monitoring for up to 3 users Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPs, QoS
Interface Protocol	ONVIF
Smart Alarm	Motion detection; SD card full; SD card error
Intelligent Analytics	Exception, Line Crossing, Intrusion
General function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE	Yes
Others	
Power Supply	DC12V / PoE
Power Consumption	< 4.5W
Operating Environment	- 30 ° C ~ 60 ° C (-22° F~140° F) Humidity: less than 95 % (non-condensing)
Dimensions	Φ 94.6 × 82.8 mm
Weight	Approx. 460g
Installation	Ceiling mounting; Wall mounting
Ingress Protection	IP67
HVER	B

DORI Distance				
Lens	Detect	Observe	Recognize	Identify
2.8mm	40.62m (133.26ft)	16.25m (53.31ft)	8.12m (26.64ft)	4.06m (13.32ft)

Accessories


B627


B639


B609


B615


B616


B642


B628